

# ASPECT

## Zebra 32 LED

To highlight crossings with clearly defined contrast and provide excellent vertical illumination of pedestrians.



### SPECIFICATION

- ✓ LED colour temperature 3000K, 4000K or 5700K
- ✓ Colour rendering index >70
- ✓ Projected L90 after 100,000 hours
- ✓ Power factor >0.95 at full load
- ✓ Polyester powder coat finish in light grey, dark grey, black or a bespoke colour
- ✓ High quality high pressure die cast LM6 aluminium components
- ✓ Stainless steel fixing screws with stainless steel inserts in pivot
- ✓ Toughened flat glass cover
- ✓ Replaceable gear tray without the need for tools
- ✓ CLO available
- ✓ PowerSet feature - Field adjustable, integral power output selection device (optional)
- ✓ Controls - NEMA 3, 7, Miniature photocell and Zhaga book 18 (SR) socket
- ✓ Part Night Dimming (PND) with manual dimming override option
- ✓ Dim level 10-100%
- ✓ DALI compatible for use with CMS
- ✓ Optional surge protection 10kV/10kA
- ✓ Post top mounting 60mm or 76mm
- ✓ Side entry mounting of 34mm, 42mm, 60mm or 76mm
- ✓ Post top inclination of 0°, +5° and +10°
- ✓ Side entry inclination of -10°, -5°, 0°, +5°, +10°
- ✓ Tool-less access
- ✓ UMSUG codes available for full product range



IP66  
Ingress Protection



IK08  
Impact Resistance



8kg Weight



Electrical Class I



0.059m² Wind Area



-20 to +40°C Ambient



LED Light Source



International Dark-Sky Association approved Aspect Zebra 32 LED. Compliant when using a colour temperature of 3000K or below and at zero degree tilt.

## PowerSet

The PowerSet module allows on site power adjustment providing maximum flexibility both in-situ and for stock holding. Each module accommodates the selection of any one of the range of UMSUG coded system powers for Aspect Zebra 32 LED.



## ELECTRICAL CHARACTERISTICS

System Power	34-95W
LED CCT	3000K, 4000K or 5700K
LED CRI	>70
Lumen Output	Up to 13,058lm
Lumen Maintenance	Projected L90 after 100,000 hours
Drive Current	332-940mA
Driver Output	Constant current output with AM dimming
Power Factor (Full Load/Half Load)	0.95/0.90
Operational Voltage	220-240VAC rms
Operating Frequency	50/60Hz
Inrush Current (Apk/50%-S)	57A/210µS
Running Current (max)	395mA
Surge Protection (COM/DIF)	8kV/6kV
Additional Surge Protection (on request)	10kV/10kA
Lighting Controls Options	NEMA 3, 7, Miniature photocell, Zhaga Book 18 (SR) socket, PND and CMS compatible
Dimming Protocols	DALI

## MECHANICAL CHARACTERISTICS


Housing Material	High pressure die cast aluminium
Cover Material	Toughened flat safety glass
Lens Material	PMMA
Housing Finish	Chromate free pre-treatment, polyester powder coat, light grey (RAL9006), dark grey (RAL7022), black (RAL9005) or bespoke colours on request
Ingress Protection Rating	IP66
Weight	8kg
Wind Area	0.059m <sup>2</sup>
Impact Resistance Rating	IK08
Mounting Methods	Post top 60mm or 76mm/side entry 34mm, 42mm, 60mm or 76mm
Mounting Inclination	-10°, -5°, 0°, 5°, 10°
Photometric Centre	350mm (to centre of PCB)

## ACCESSORIES

Rear Shield	81BAF70458	Front Shield	81BAF70459	Side Shield	81BAF70510
-------------	------------	--------------	------------	-------------	------------

### TR12 FOR ZEBRAS

- A** Front of Kerb (Vertical Grid at 1.5m)  
2 times road average
- B** Centre of Crossing (Vertical Grid at 1.5m)  
2 times road average
- C** Rear of Waiting Area (or 1.8m back from the kerb, whichever is less)  
(Vertical Grid at 1.5m)  
1.5 times road average
- D** Crossing Carpet (Horizontal Illuminance)  
3.5 times average for road and 60% Uo

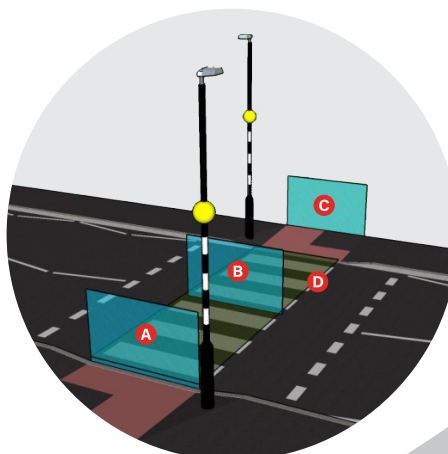

All information detailed within this datasheet is accurate at the date of issue. The information provided is subject to change at our discretion. If any questions arise or extra information is required, please contact TRT Lighting directly. Aspect Zebra 32 LED Datasheet issue Oct 2023.



FOR MORE INFORMATION

+44 (0) 1527 521 162  
www.trtlighting.co.uk