


CHALIS SHIELD


INSTALLATION GUIDE



PREPARE THE SHIELD

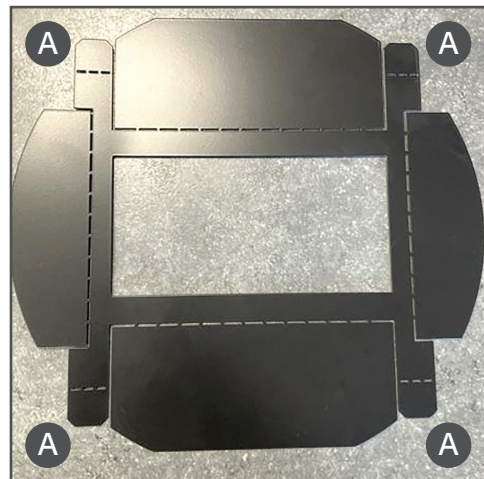

- 1 Fold **DOWN** tab corners indicated on drawing "A" to approx 90 degrees.

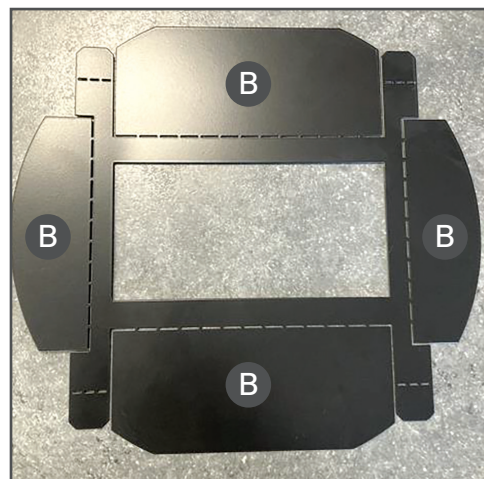


- 2 Fold **UP** shield sides indicated on drawing "B" to approx 45 degrees.




- 3 Completed version should look like image to the left.




INSTALL THE SHIELD

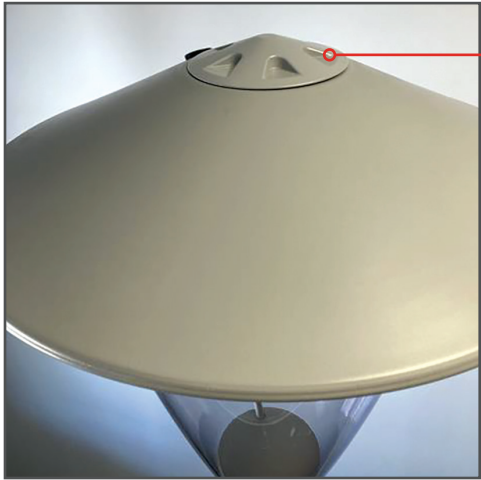


4 Remove top canopy of Chalis by unscrewing dome cover nut.

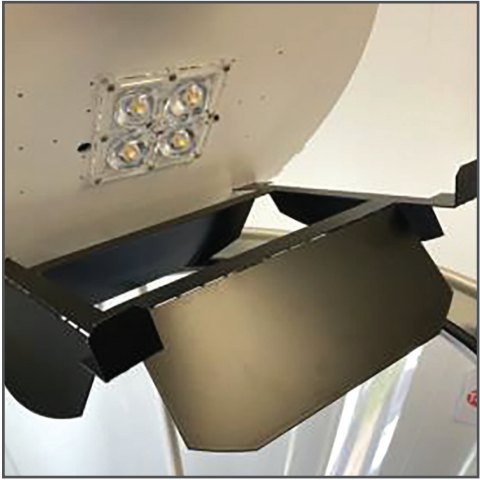

7 Offer shield onto gear tray into slots marked "x".

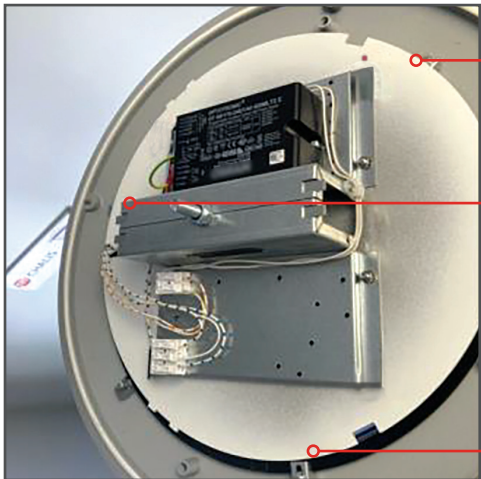

5 Using a PZ2 pozidrive slacken 3 x gear tray retaining screws and slide clips to the side allowing for removal of gear tray.

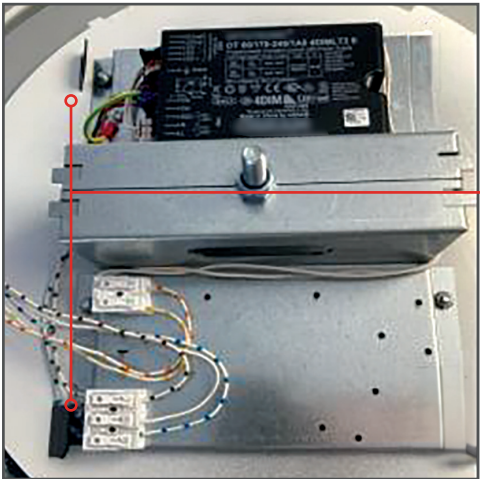

8 Bend protruding tabs to secure shield onto gear tray.

9 Re-assemble fitting in reverse as per stage 6.



6 Lift gear tray up ensuring product wiring not disturbed.





TRT Lighting Ltd
Heming Point | Claybrook Drive | Washford Ind Est | Redditch | B98 0FH | United Kingdom
t +44 (0)1527 521162 e info@trtlighting.co.uk

www.trtlighting.co.uk