



# ALTURA

## CONTROL GEAR ENCLOSURE



IP66  
Ingress Protection



Up to IK10  
Impact Resistance



Standard 4.3kg  
Emergency 4.7kg  
Lumi-LinQ Standard 4.5kg  
Lumi-LinQ Emergency 4.9kg



Electrical Class I

### SPECIFICATION

- ✓ Steel wall mounted enclosure box with gland plate
- ✓ Light grey polyester powder coated surface (RAL7035)
- ✓ Double bar door lock
- ✓ Mains input 230V AC
- ✓ 1 x M20 gland provided for mains input
- ✓ M16 gland(s) provided for handrail driver power/DALI cables

### RANGE OVERVIEW

| Product | System Power | Control Types |           |                    |                     |
|---------|--------------|---------------|-----------|--------------------|---------------------|
|         |              | Standard      | Emergency | Lumi-LinQ Standard | Lumi-LinQ Emergency |
| AGE     | 18-200W      | ✓             | ✓         | ✓                  | ✓                   |

| DRIVER WATTAGE | QTY OF ALTURA MIDI MODULES | QTY OF ALTURA MAXI MODULES |
|----------------|----------------------------|----------------------------|
| 18W            | 1-3                        | 1-2                        |
| 35W            | 4-7                        | 3-4                        |
| 60W            | 8-12                       | 5-7                        |
| 100W           | 13-20                      | 8-12                       |
| 200W           | 21-40                      | 13-25                      |

### EMERGENCY VERSION INCLUDES

3hr integral emergency battery and module (LiFePO4)


### LUMI-LINQ EMERGENCY VERSION INCLUDES

Mid-bay Lumi-LinQ pod complete with backpack and wip antenna

DALI PSU

# DIMENSIONS

300MM (H) X 250MM (W) X 150MM (D)

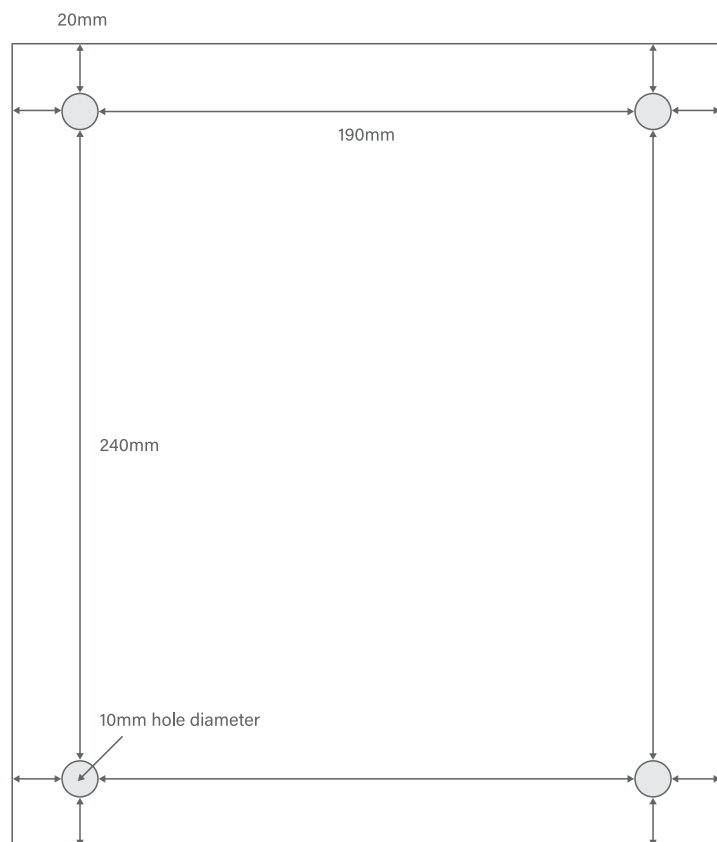

All information detailed within this datasheet is accurate at the date of issue. The information provided is subject to change at our discretion. If any questions arise or extra information is required, please contact TRT Lighting directly. ALTURA CONTROL GEAR ENCLOSURE Datasheet issue July 2026.



FOR MORE INFORMATION

+44 (0) 1527 521 162  
[www.trtlighting.co.uk](http://www.trtlighting.co.uk)



TRT LIGHTING

# LUMI-LINQ

## REMOTE ENCLOSURE



IP66  
Ingress Protection



Up to IK06  
Impact Resistance



1.7kg Weight



Electrical Class I

### SPECIFICATION

- ✓ Steel wall mounted enclosure box with gland plate
- ✓ Light grey polyester powder coated surface (RAL7035)
- ✓ Cam door lock
- ✓ Mains input 230V AC
- ✓ 1 x M20 gland provided for mains input

### Lumi-LinQ


An innovative wireless lighting control system that allows users to monitor their energy performance data and complete operational status information for all Lumi-LinQ standard and emergency luminaires.

Legally, BS EN 50172 requires each luminaire to complete a function test once a month and a full 3-hour duration test annually. Performing this process manually requires someone to be present to ensure that the luminaire stays lit for the duration of the tests, a time consuming and costly process. Lumi-LinQ Emergency provides centralised testing and reporting options via its website.



# DIMENSIONS

150MM (H) X 150MM (W) X 120MM (D)

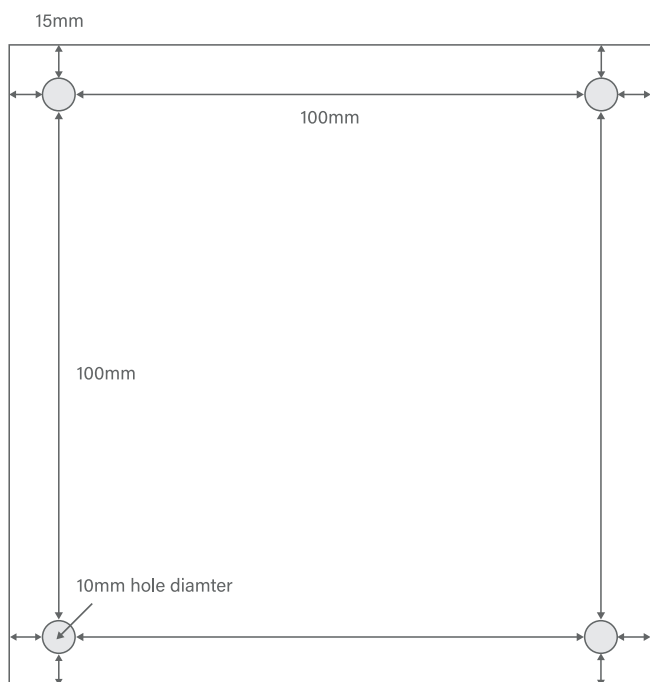

All information detailed within this datasheet is accurate at the date of issue. The information provided is subject to change at our discretion. If any questions arise or extra information is required, please contact TRT Lighting directly. Lumi-LinQ Remote Enclosure Datasheet issue July 2026.



FOR MORE INFORMATION

+44 (0) 1527 521 162  
[www.trtlighting.co.uk](http://www.trtlighting.co.uk)